

Cable Peeler Drive Model Unipower 34R

Option for manual peeling tools Model CP90 and CP130



Application

Drive Model Unipower 34R can be used in combination with the cable peeler Models CP90 and CP130. It allows to make a motor driven tool out of a manual tool.

CP90 and CP130 are equipped with the necessary adaptors as a standard.

This drive is very convenient for peeling the outer semicon of relatively long cable ends, typical for mounting end terminations.

It can also be used for speeding up the insulation stripping process.

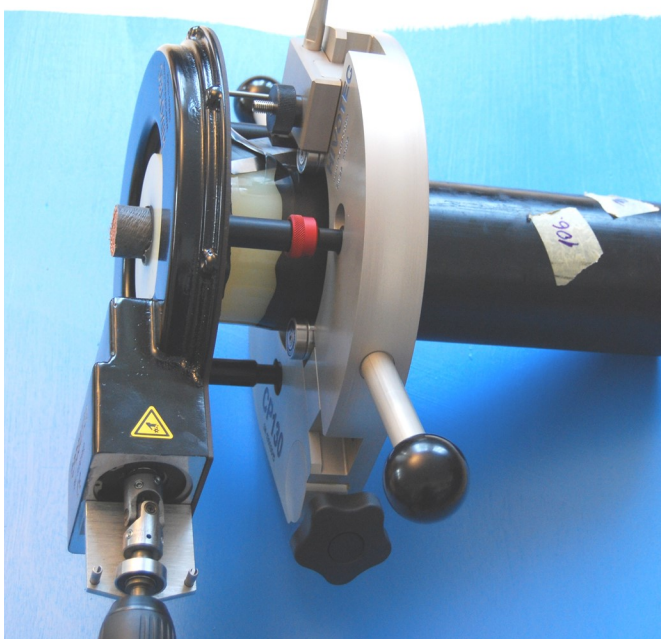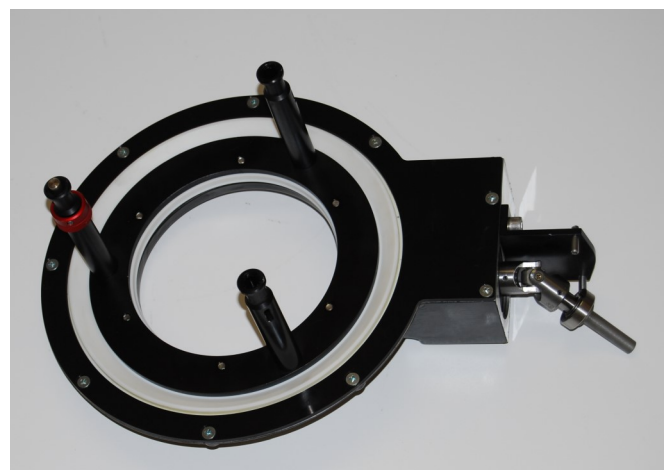

Main Benefits

- The drive can be attached and detached to the peeling tool within seconds
- Drastic reduction of process time
- Allows to avoid a large number of repetitive movements of the installer
- The peeling tool moves around the cable without interruption thus avoiding marks on the insulation surface
- Minimal lateral forces on the peeling tool
- Can be used for horizontal and vertical cable position
- Low weight solution
- Low maintenance solution
- Can be used with your own electric power drill

Main Technical Data for Unipower 34R

Gear box

- Compatible with Peeling Tools Model CP90 and CP130
- For cable diameters of 50 to 130 mm
- Net weight: 2.5 kg
- Gross weight: 4.5 kg
- Dimensions of tool box: 35 x 33 x 18 cm

Drill Recommendation

- Speed 0-360/0-1500 1/min,
- stage less speed control
- Max. torque 60 Nm,
- Automatic spindle locking system

Technical Description

Unipower 34R is driven by a manually operated drill (Drill not included in package)

Unipower 34R itself is basically a gear box which adapts the speed of the drill to the speed needed by the peeling tool.

The Unipower 34R is attached to the cable peeler by means of a simple snap-in device which interlocks without the use of any tools.

It can be removed by releasing the lock by one hand operation.

In order to make the system suitable for peeling cables in a vertical position, the weight of both, the peeling tool and the drive is kept low. This allows to keep the increase of feed during peeling at a minimum.

Sample picture of possible set-up



Scope of Supply

- 1 Toolbox
- 1 Cable Peeler Drive Unipower 34R
- 1 Instruction manual English

Hivotec Ltd.
Ziegeleistrasse 52
4242 Laufen
Switzerland

Phone
Fax
E-mail
URL

+ 41 61 303 90 11
+ 41 61 302 21 91
info@hivotec.com
www.hivotec.com